


LOUVRE SOLUTIONS LS 200 LOUVRE

SPECIFICATION

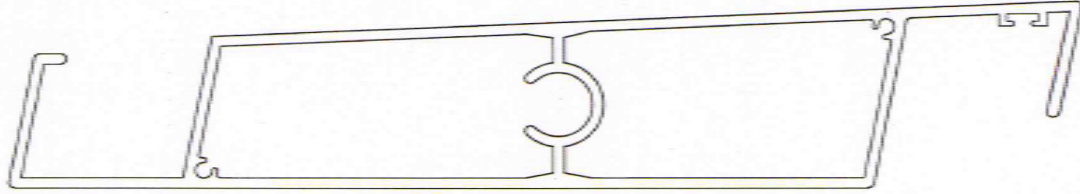

<i>Alloy</i>	<i>6060-T5</i>	
<i>Weight</i>	<i>2.80 kg/lm</i>	
<i>Finish</i>	<i>12 micron anodised or powdercoated finish</i>	
<i>Components and fastenings</i>	<i>Stainless steel</i>	
<i>Bushes</i>	<i>self lubricating nylon material</i>	
<i>Endcaps</i>	<i>3mm stainless steel</i>	
<i>Max span horizontal blades L, M, wind zones *</i>	<i>4.8m/l 4.3m</i>	
<i>Max span horizontal blades H wind zone *</i>	<i>3.8m</i>	
<i>Max span horizontal blades V H wind zone *</i>	<i>3.5m</i>	

***Note:**

Low wind speed (up to 32m/sec)

Medium wind speed (up to 37m/sec)

High wind speed (up to 50m/sec)

Low, medium, high and very high wind speeds are determined for small buildings using NZS

3604:199. The 32, 37, 44 and 50m/sec wind speeds are site wind speeds as defined by NZS

1170:2002